

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/088610 A3**(51) International Patent Classification<sup>7</sup>: **G02B 3/14**,  
26/02, G11B 7/135(21) International Application Number:  
PCT/IB2005/050742

(22) International Filing Date: 1 March 2005 (01.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
04100866.5 4 March 2004 (04.03.2004) EP(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KUIPER, Stein** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HENDRIKS, Bernardus, H., W.**, [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).(74) Agents: **UITTENBOGAARD, Frank** et al.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA,

[Continued on next page]

(54) Title: AN OPTICAL COMPONENT FOR INTRODUCING OPTICAL ABERRATIONS TO A LIGHT BEAM

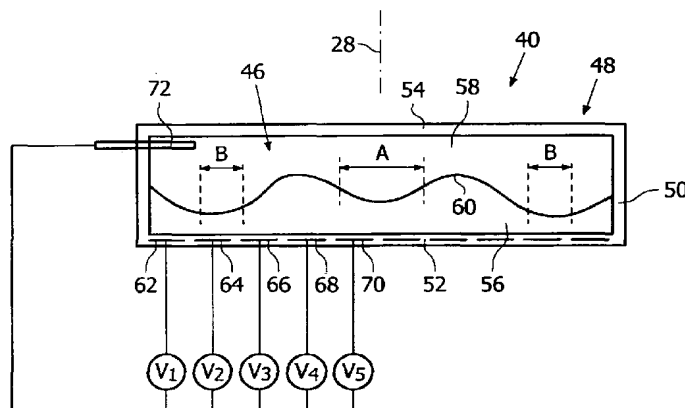

(57) Abstract: An optical component (48) for introducing optical aberrations to a light beam defining an optical axis (28) is described, comprising a fluid chamber (46) having a first fluid (56) and at least a second fluid (58) therein, the first and second fluid (56, 58) being nonmiscible, the first fluid (56) and the second fluid (58) being in contact along an interface (60) extending through the fluid chamber (46) substantially transverse to the optical axis (28), the first and second fluids (56, 58) having different indices of refraction, the first fluid (56) being substantially electrically insulating and the second fluid (58) being substantially electrically conductive; at least a first electrode (62 - 70) separated from the second fluid (58) and at least a second electrode (72) acting on the second fluid to alter the shape of the interface (60) in dependence on a voltage applied between the first and second electrode (62 - 70, 72). The at least one first electrode (62 - 70) is arranged in an intermediate portion with respect to the interface (60) such that the intermediate portion (A, B) of the interface (60) is moved substantially in direction of the optical axis (28) in dependence on the voltage applied between the at least one first electrode (62 - 70) and the at least one second electrode (72)



WO 2005/088610 A3



ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

— with international search report

**(88) Date of publication of the international search report:**  
2 March 2006

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*